

DPF 70/6...

6-cavity duplexer for the 450 MHz band

- The DPF 70/6... is a 6-cavity duplex filter for duplex transceivers.
- The DPF 70/6... can be adjusted within the complete 406 - 470 MHz band. The duplexer can be delivered in four different versions according to required duplex spacing. See also "Ordering information" below.

DESCRIPTION

- The DPF 70/6... is primarily intended for equipment where the TX and RX operate on single frequencies, but it can also, however with slightly reduced data, be used where the TX and RX operate on multi channels, i.e. within a certain port bandwidth. In the last case, factory-tuning is recommended.
- The filter uses full-length $\frac{1}{4} \lambda$ cavities in a compact extruded aluminium housing. The chassis is made of passivated steel, and teflon insulation has been applied in the coaxial cables and in the connectors.
- DPF 70/6... is coated with black vinyl to prevent corrosion.

ORDERING DESIGNATION

TYPE	DUPLEX SPACING (MHz)	PRODUCT NO.
DPF 70/6-5/7-N(f)	5 - 7	200000392
DPF 70/6-7/9-N(f)	7 - 9	200000404
DPF 70/6-9/13-N(f)	9 - 13	200000414
DPF 70/6-13/16-N(f)	13 - 16	200000419
ACCESSORIES		
19" DPF Mounting kit		210002327

PLEASE NOTE


Special configurations of this filter type may be quoted on request. For instance, the filter can be delivered with other connector types, or with flying leads (RG 316 coaxial cable) terminated with connectors or for soldering-connection.




SPECIFICATIONS

ELECTRICAL	
MODEL	DPF 70/6...
TX/RX FREQUENCY	406 - 470 MHz
MAX. INPUT POWER	50 W
TX NOISE SUPPRESSION ON RX-FREQUENCY	
Single-channel tuned:	≥ 85 dB
Multi-channel tuned, 2 MHz BW:	≥ 65 dB
INSERTION LOSS TX-ANT AND ANT-RX (at 10 MHz duplex spacing)	
Single-channel tuned:	≤ 1.2 dB (typ. 1.0 dB)
Multi-channel tuned, 2 MHz BW:	≤ 1.2 dB (typ. 1.0 dB)
RX ISOLATION ON TX-FREQUENCY	
Single-channel tuned:	≥ 85 dB
Multi-channel tuned, 2 MHz BW:	≥ 65 dB
IMPEDANCE	Nom. 50 Ω
SWR (All ports)	≤ 1.5
MECHANICAL	
FREQ. STABILITY	Approx. 4.5 ppm/° C
CONNECTIONS	N-female BNC(f), TNC(f), UHF(f), SMA(f) on request
DIMENSIONS (L x W x H)	226 x 154 x 33 mm / 8.9 x 6.0 x 1.3 in.
WEIGHT	Approx. 990 g / 2.2 lb.
ENVIRONMENTAL	
TEMP. RANGE	-30° C → +60° C

TYPICAL RESPONSE CURVES @ 10 MHZ SPACING

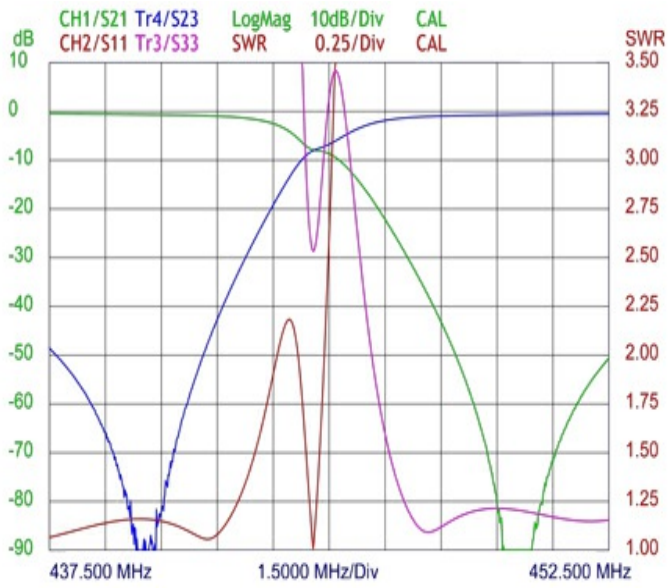

MOUNTING DETAILS

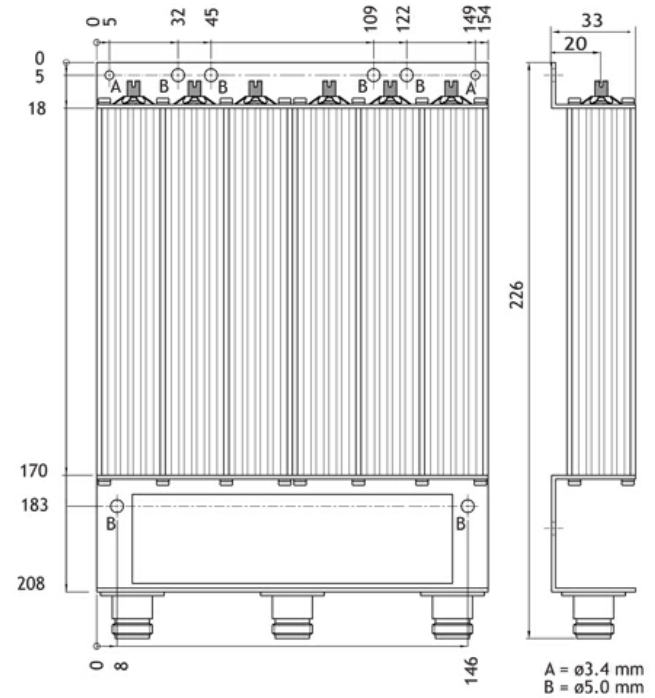

ORDERING INFORMATION

When ordering, please use the table to select the appropriate ordering designation for the desired filter type. If duplex TX and RX frequencies are stated when ordering, the duplexers are delivered factory-adjusted. If TX and RX frequencies are not stated, the filters are delivered non-adjusted.

